

Product Description

DuPont™ Kalrez® perfluoroelastomer parts are the material of choice for mechanical seals, valves, flanges and other demanding chemical and hydrocarbon processing applications.

Kalrez® Spectrum™ 7075 is positioned in the Kalrez® Spectrum™ family of products which are designed for the chemical processing industry. Compound 7075 offers enhanced physical performance properties including very low compression set (Figure 1).

Typical Physical Properties¹

Color	Black
Hardness ² , Shore A	75
100% Modulus ³ , MPa (psi)	7.58 (1100)
Tensile at Break ³ , MPa (psi)	17.91 (2600)
Elongation at Break ³ , %	160
Compression Set, %	
70 hr at 204 °C (400 °F) ⁴	12
70 hr at 204 °C (400 °F) ⁵	15
Maximum Service Temperature ⁶ , °C (°F)	327 (620)

¹ Not to be used for specifications

² ASTM D2240 (pellet test specimens)

³ ASTM D412 (dumbbell test specimens)

⁴ ASTM D395B, (pellet test specimens)

⁵ ASTM D395 (AS568 K214 O-ring test specimens)

⁶ DuPont proprietary test method

Thermal, Chemical, and Mechanical Performance


Kalrez® Spectrum™ 7075 is designed for general-purpose use as O-rings or custom sealing components in the chemical and hydrocarbon processing industries. It is a carbon black-filled compound with mechanical properties designed for improved sealing performance in temperature cycling applications. 7075 has improved thermal resistance that extends maximum service temperature to 327 °C (620 °F). It is not suggested for use in severe aqueous and amine applications where Kalrez® Spectrum™ 6375 remains the preferred compound. As always, we recommend the specific chemicals, service temperature and pressure be reviewed for the optimal compound selection in each application.

Kalrez® Spectrum™ 7075 offers very low compression set as measured by ASTM D395 to predict heat resistance. DuPont compression set testing extends the standard ASTM 70 hour protocol to include 336 and 672-hour compression set testing, which better predicts long-term O-ring performance. Lower compression set results in improved sealing and longer service life.

Applications

DuPont™ Kalrez® Spectrum™ 7075, with its low compression set, is a great choice for today's

Figure 1. Compression Set at 204 °C

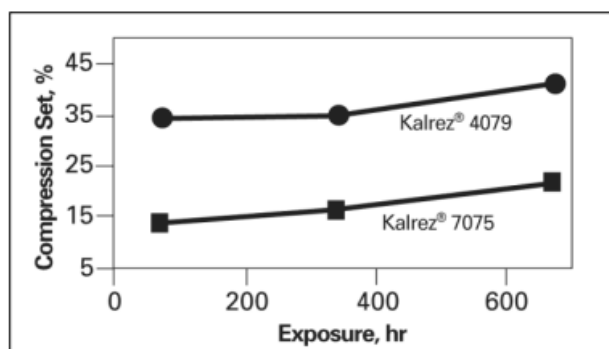

smaller and lighter mechanical seals, which are expected to perform as efficiently as larger mechanical seals. The smaller mechanical seal designs, with reduced spring force retention, put additional demands on elastomeric O-rings with reduced cross sections. The smaller cross section O-rings are more prone to



The miracles of science™

AUTHORIZED DISTRIBUTOR

DuPont™ Kalrez®
PERFLUOROELASTOMER PARTS

"Ask for the Seal You Can Trust"

VARISCO & CO

compression set which can reduce their functional effectiveness, thereby reducing the operability of the mechanical seal.

Quick connector couplings also benefit from the outstanding compression set of Kalrez® Spectrum™ 7075 and its enhanced temperature cycling capabilities. Combined with low swell in a wide range of chemicals, this compound ensures reliable performance of modern fluids handling systems.

Chemical Resistance to:	DuPont™ Kalrez® Spectrum™ 7075	DuPont™ Kalrez® Spectrum™ 4079	DuPont™ Kalrez® Spectrum™ 6375
Aromatic/Aliphatic Oils	++++	++++	++++
Acids	++++	++++	++++
Bases	+++	+++	++++
Alcohols	++++	++++	++++
Aldehydes	++++	+++	+++
Amines	++	+	++++
Ethers	++++	++++	++++
Esters	++++	++++	++++
Ketones	++++	++++	++++
Steam/Hot Water	++	+	++++
Strong Oxidizers	++	++	++
Ethylene Oxide	+++	X	++++
Hot Air	++++	++++	+++

++++ = Excellent +++ = Very Good ++ = Good + = Fair X = Not Recommended

Visit us at kalrez.dupont.com or vespel.dupont.com

Contact DuPont at the following regional locations:

North America
800-222-8377

Latin America
+0800 17 17 15

Europe, Middle East, Africa
+41 22 717 51 11

Greater China
+86-400-8851-888

ASEAN
+65-6586-3688

Japan
+81-3-5521-8484

The information provided in this data sheet corresponds to our knowledge on the subject at the date of its publication. This information may be subject to revision as new knowledge and experience becomes available. The data provided fall within the normal range of product properties and relate only to the specific material designated; these data may not be valid for such material used in combination with any other materials, additives or pigments or in any process, unless expressly indicated otherwise.

The data provided should not be used to establish specification limits or used alone as the basis of design; they are not intended to substitute for any testing you may need to conduct to determine for yourself the suitability of a specific material for your particular purposes. Since DuPont cannot anticipate all variations in actual end-use and disposal conditions, DuPont does not guarantee favorable results, makes no warranties and assumes no liability in connection with any use of this information. All such information is given and accepted at the buyer's risk. It is intended for use by persons having technical skill, at their own discretion and risk. Nothing in this publication is to be considered as a license to operate under or a recommendation to infringe any patent. DuPont advises you to seek independent counsel for a freedom to practice opinion on the intended application or end-use of our products.

CAUTION: Do not use DuPont materials in medical applications involving implantation in the human body or contact with internal body fluids or tissues unless the material has been provided from DuPont under a written contract that is consistent with DuPont policy regarding medical applications and expressly acknowledges the contemplated use. For further information, please contact your DuPont representative. You may also request a copy of DuPont POLICY Regarding Medical Applications and DuPont CAUTION Regarding Medical Application.

Copyright © 2014 DuPont. The DuPont Oval Logo, DuPont™, The miracles of science™, Kalrez®, and Vespel® are trademarks or registered trademarks of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.

(03/13) Reference No. KZE-A11073-00-C0518



The miracles of science™

